



Double Sided Gun Rack

Tools required: 5/32" allen wrench (included), drill (not included). One to two person assembly recommended.


PARTS




Leg A
x 2




Leg B
x 2

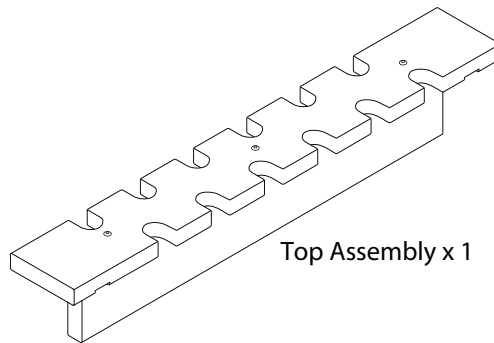


Top Assembly x 1

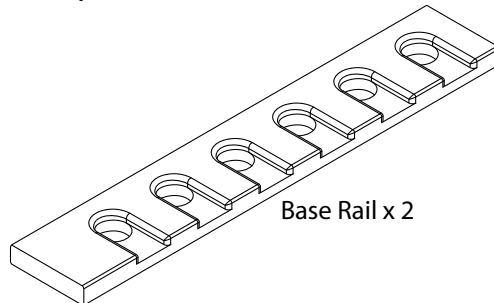


Base Rail x 2




Support x 2




1" Cap Screw x 14




2.5" Exterior Wood Screw x 12



T25 Torx Bit x 1




5/32" Allen Wrench x 1

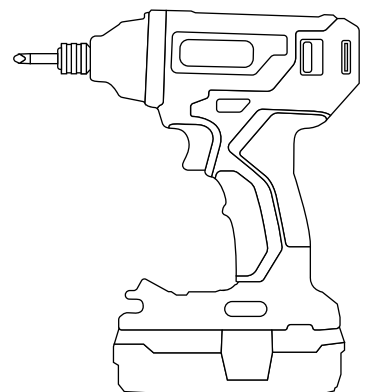

Drill (not included)

Fully Assembled

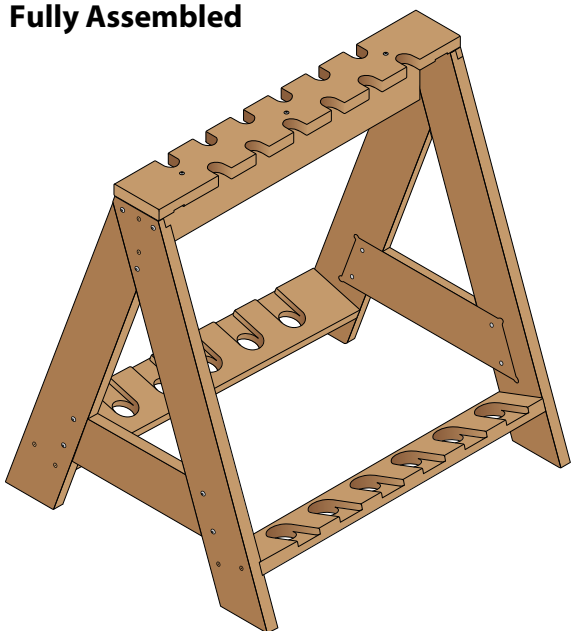


ASSEMBLY

STEP 1

Using allen wrench to fasten screws:


1. Assemble leg A to leg B using three 1" cap screws.
2. Attached support to legs using four 1" cap screws.
3. Repeat #1 & 2 using remaining legs, support, and 1" cap screws.

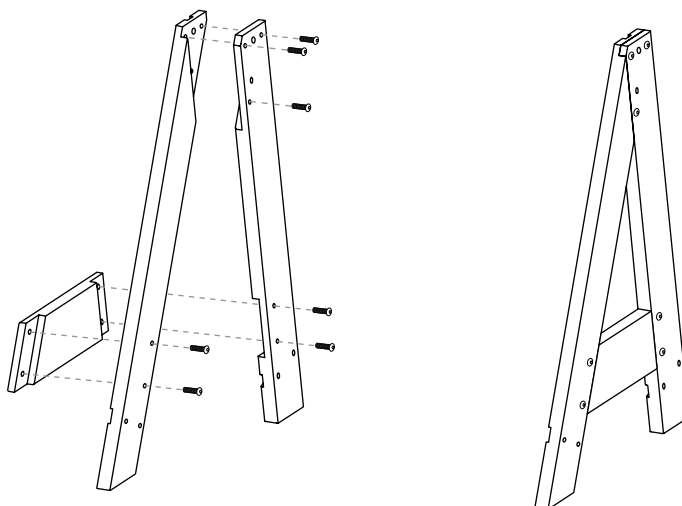

STEP 2

Using drill and T25 Torx bit:

1. Slide top assembly into grooves on leg assemblies.
2. Attach using four 2.5" wood screws.
Do not over tighten wood screws. They can easily strip out.

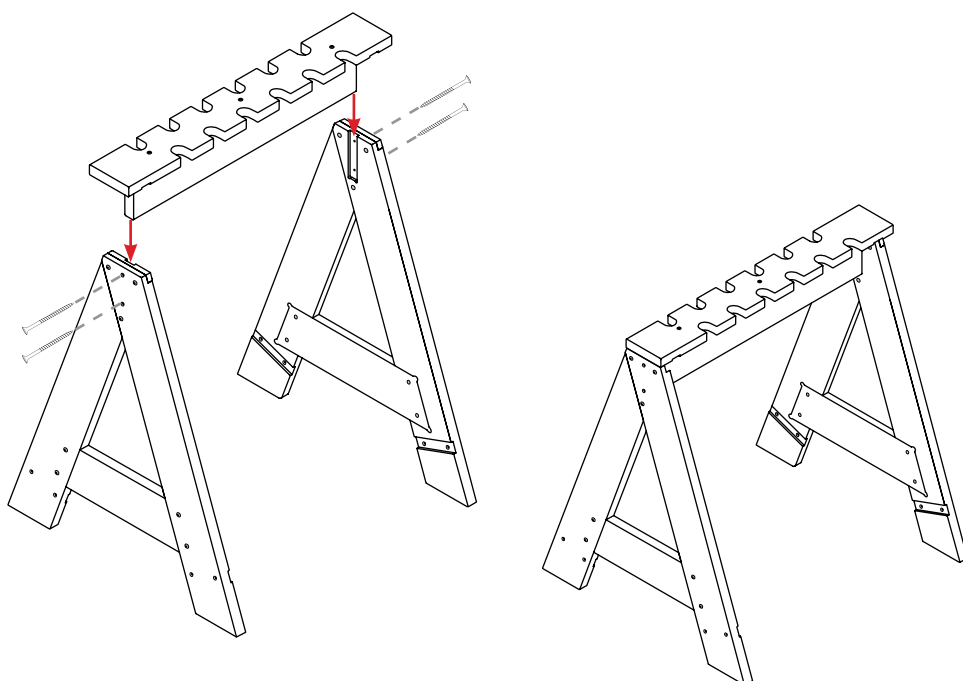

STEP 3

Using drill and T25 Torx bit:

1. Slide base rail into grooves on leg assemblies.
2. Attach using four 2.5" wood screws.
Align flush with legs. ***Do not over tighten wood screws. They can easily strip out.***
3. Repeat for other side of rack.

